EMCview Pre-Compliance Measurement Report 2/10/2026 5:30:08 PM

EMC Standard	FCC Part 15 Subpart B Class B
DUT / Serial Number	Osluv OpenExcimer Prototype Rev 1.0.0 Prototype
Manufacturer	OSLUV
Operating Voltage	120V
Temperature / Air humidity / Atmospheric pressure	24C 24% RH 986hPa
Operating Condition	Phase
Test Site	The OSLUV Project - 680 Transfer Rd Saint Paul MN 55114
Spectrum Analyzer	Siglent SSA 3032X Plus
Spectrum Analyzer Serial Number	SSA3PCEC6R0029
Operator	The OSLUV Project
Comment	Seperated, Linear arranagement with shortest wire

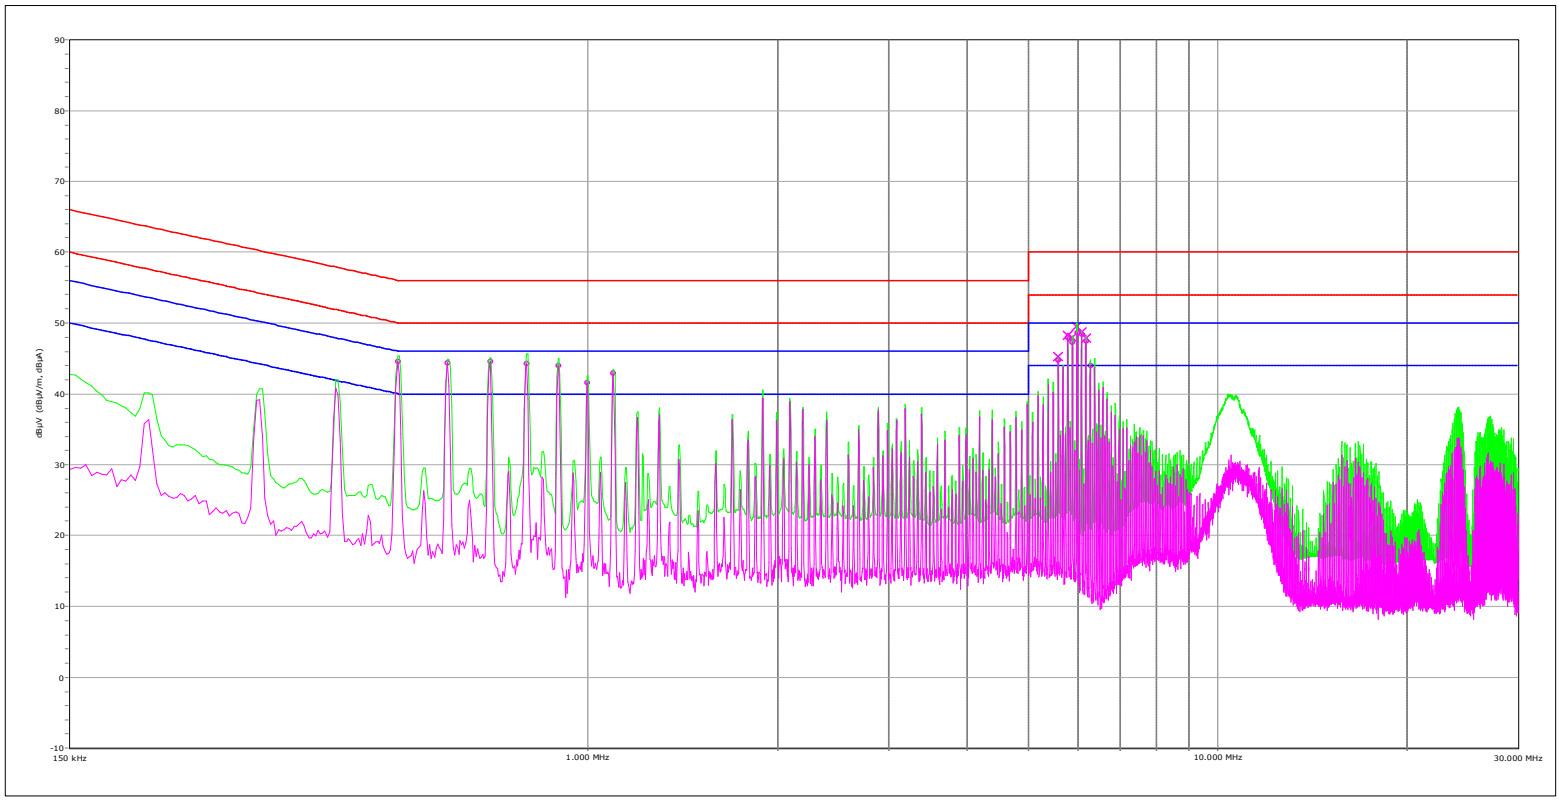

Legend:

set1 set2 lim1 lim2

EmcView: V11.09 #55220
Project:
Project: [CN_FCC15_SPTB_Class_AB_OSLUV.prj]

Set1:
SEG: FCC15_V1_4\CN\CN_FCC15_SPTB_QP.seg
SEG: FCC15_V1_4\CN\CN_FCC15_SPTB_AVG.seg_rtr10
LIM: FCC15_V1_4\CN\CN_FCC15_SPTB_CLASS_B_QP.lim

Set2:
SEG: FCC15_V1_4\CN\CN_FCC15_SPTB_AVG.seg
SEG: FCC15_V1_4\CN\CN_FCC15_SPTB_PK.seg_rtr10
LIM: FCC15_V1_4\CN\CN_FCC15_SPTB_CLASS_B_AVG.lim

HW Setup:
LISN: COMP\LISN\Tekbox_TBL5016_1_50uH.lsc
CABLE:none
ANT:none
AMP:COMP\Amplifiers\Tekbox_TBFL1.amp
ANT1:none

Peaks Set1

Nb	Det	Freq	Level	Lim	Margin	*DET	*Freq	*Level	*Lim	*Margin	Result
		[kHz]	dBµV	dBµV	[dB]		[kHz]	dBµV	dBµV	[dB]	

Peaks Set2

Nb	Det	Freq	Level	Lim	Margin	*DET	*Freq	*Level	*Lim	*Margin	Result
		[kHz]	dBµV	dBµV	[dB]		[kHz]	dBµV	dBµV	[dB]	
1	VAV	49 7.8	44.56	46.03	1.47						passed
2	VAV	598.07	44.39	46.00	1.61						passed
3	VAV	698.33	44.58	46.00	1.42						passed
4	VAV	79 8.6	44.34	46.00	1.66						passed
5	VAV	895.73	44.03	46.00	1.97						passed
6	VAV	996	41.61	46.00	4.39						passed
7	VAV	1 096.27	42.97	46.00	3.03						passed
8	VAV	5 580	44.83	50.00	5.17	QP	5 580	45.24	60.00	14.76	passed
9	VAV	5 780	48.01	50.00	1.99	QP	5 780	48.25	60.00	11.75	passed
10	VAV	5 880	47.34	50.00	2.66	QP	5 880	47.95	60.00	12.05	passed
11	VAV	5 980	48.64	50.00	1.36	QP	597 5.5	49.52	60.00	10.48	passed
12	VAV	6 080	48.42	50.00	1.58	QP	607 5.5	48.74	60.00	11.26	passed
13	VAV	6 176.67	47.45	50.00	2.55	QP	6 176.67	47.91	60.00	12.09	passed
14	VAV	6 276.67	44.05	50.00	5.95						passed